



TUNNEL LOADING MACHINE

ITC 312 - SL




- For heading in soft ground and high speed mucking of blasted rock
- Minimal cross section approx. 17 m²
- Diesel drive 165 kW
- Electric drive 110 kW
- Operating weight approx. 39,3 t

Made in Germany by



ITC 312 SL

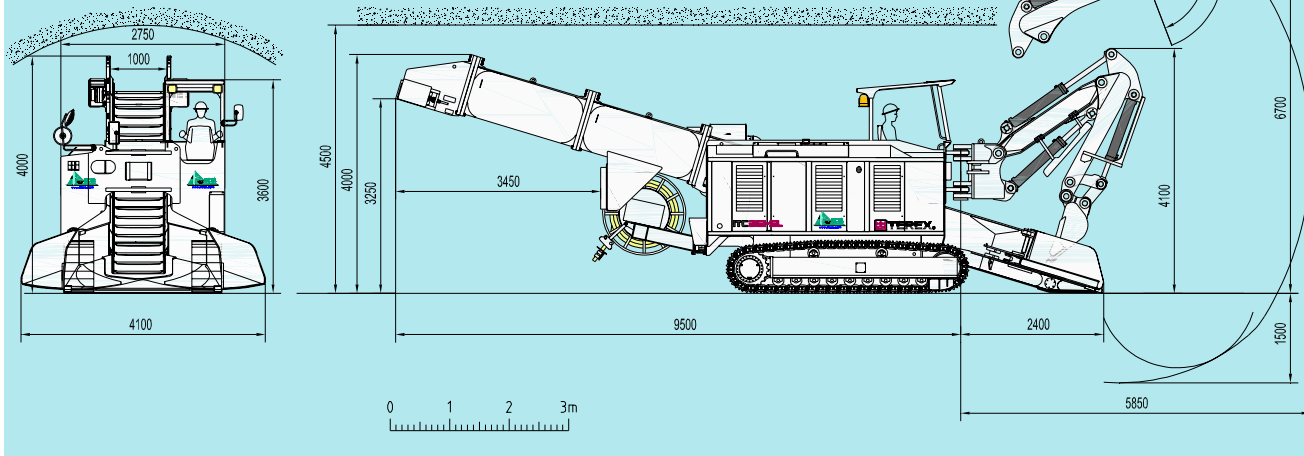

Technical data ITC 312 – SL

Drive units

Electro-hydraulic and Diesel hydraulic power packs each with a separate pump unit with variable flow rate
 Electric drive for emission-free work at the face
 Air-cooled electric motor, power at 400 Volt , 50 Hz 110 kW
 Diesel drive for travelling and operation without electric supply.
 Water-cooled diesel engine. Deutz TCD2013 L06 2V
 Power rating at 2,000 r.p.m 165 kW
 Diesel engine complies with emission standard EEC Euro St. 3

Electrical system

Total installed power 115 kW
 Voltage (standard) 400 V - 50 Hz AC
 Control voltage 230 V - 24 V DC
 Electrical system acc. to EN 60529 (IP54)
 Cable reel hydraulically driven for 85 m cable 3x120+3x25 mm²

Operator's cab

FOPS Operator's cab gives all-round visibility
 Roof foldable for transport.
 CE conformity incl. video monitoring system for the right and rear side with colour LCD in the cab.

Hydraulic system

One axial piston double pump in swash plate design with constant power control for travelling and main working functions. One gear pump for pilot pressure supply.
 Hydr. pilot control for travelling and main working functions
 Boom control with 2 joysticks in Euro standards
 Thermostatic controlled hydr. driven oil/air cooler
 Max. hydraulic operating pressure 250-350 bar
 Hydraulic oil capacity (incl. tank) 500 l
 Hydraulic oil tank 400 l

Operating data

Minimal cross section approx. 17 m²
 Machine width 2'750 mm
 Maximal height 3'650 mm
 Transport height 3'350 mm
 Length (dep. on conveyor) ~13'000 mm
 Width of loading apron (adjust.) 2'700-4'100 mm
 Width of conveyor (internal) 1000 mm
 Height of conveyor (internal) 800 mm
 Conveyor capacity approx. 600 m³/h
 Conveyor discharge height 2'500-3'500 mm
 Operating weight approx. 39,3 t

Boom Equipment SL

Boom equipment for loading of soft ground or blasted material, includes:

- King post with jib and dipper stick
- Excavation and mucking bucket, width 600 - 1200 mm
- Hydraulic circuit for a hydraulic rock breaker
- Loading capacity acc. to rock conditions approx. 4 - 10 m³/min

Other Equipment

It is possible to attach a range of ancillary equipment, such as different bucket sizes, ripper tooth, pony truck, rubber plated conveyor, transverse cutting unit, soot particle filter, closed cab, central lubrication device, etc.

Further details of attachments and accessories available upon request.
 Subject to modification without prior notice.