


OPERATION OF ALPINE TC20/30 TRENCH CUTTER

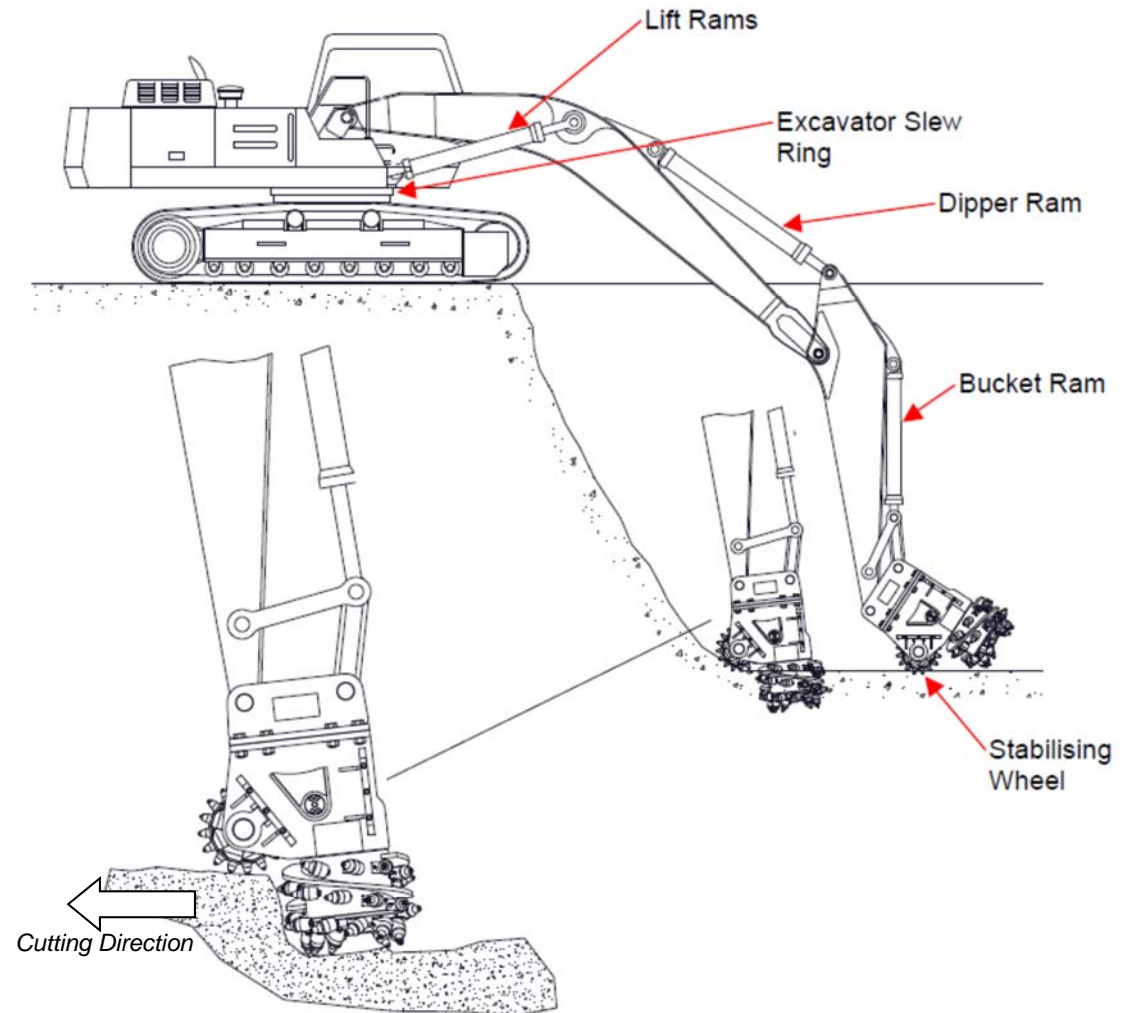

The action of the bucket ram lowering the cutting head into the cut causes the Stabilising Wheel to bite into the ground.

The axial cutting head can now be used with minimal shock loading on the excavator slew ring. The lift, dipper and bucket cylinders can all be used whilst the load is maintained on the Stabilising Wheel.